




On-Grid Inverter
with Energy Storage

Krypton 8000

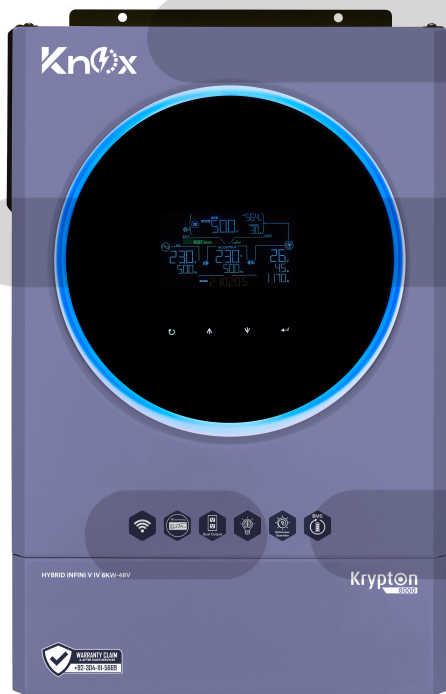

In Built Wifi



Intelligent Load Management



Grid Feeding



Batteryless Operation



Dual Output



Battery Management System

Models: Hybrid Infini V 4 Twin 6kW



Easy-to-install

- Maximum PV input current 27A
- Dual outputs, for smart load management
- Reserved communication port for BMS



Reliable

- Touchable button with 4.3" colored LCD
- Built-in WiFi for mobile monitoring (APP is available)
- Programmable multiple operation modes: Grid-tie, off-grid and grid-tie with backup



User-friendly

- Programmable supply priority for PV, Battery or Grid
- User-adjustable charging current and voltage
- Parallel operation up to 9 units

THE QUALITY SERVICE YOU EXPECT

Edengears

MODEL	InfiniSolar V 4 TWIN 6kw
PHASE	1-phase in / 1-phase out
MAXIMUM PV INPUT POWER	8000W
RATED OUTPUT POWER	6000W
MAXIMUM CHARGING POWER	6000W
GRID-TIE OPERATION	
PV INPUT (DC)	
Nominal DC Voltage / Maximum DC Voltage	360 VDC / 500 VDC
Start-up Voltage / Initial Feeding Voltage	120VDC / 150 VDC
MPP Voltage Range	120 VDC ~ 430 VDC
Number of MPP Trackers / Maximum Input Current	1 / 27A
GRID OUTPUT (AC)	
Nominal Output Voltage	220/230/240 VAC
Output Voltage Range	184 - 264.5 VAC or 195.5 - 253 VAC (Selectable)
Nominal Output Current	26A
Power Factor	> 0.99
EFFICIENCY	
Maximum Conversion Efficiency (DC/AC)	96%
OFF-GRID OPERATION	
AC INPUT	
AC Start-up Voltage / Auto Restart Voltage	120 - 140 VAC / 180 VAC
Acceptable Input Voltage Range	90 - 280 VAC or 170 - 280 VAC
Maximum AC Input Current	40 A
PV INPUT (DC)	
Maximum DC Voltage	500 VDC
MPP Voltage Range	120 VDC ~ 430 VDC
Number of MPP Trackers / Maximum Input Current	1 / 27 A
BATTERY MODE OUTPUT (AC)	
Nominal Output Voltage	220/230/240 VAC
Output Waveform	Pure sinewave
Efficiency (DC to AC)	93%
HYBRID OPERATION	
PV INPUT (DC)	
Nominal DC Voltage / Maximum DC Voltage	360 VDC / 500 VDC
Start-up Voltage / Initial Feeding Voltage	120VDC / 150 VDC
MPP Voltage Range	120 VDC ~ 430 VDC
Number of MPP Trackers / Maximum Input Current	1 / 27A
GRID OUTPUT (AC)	
Nominal Output Voltage	220/230/240 VAC
Output Voltage Range	184 - 264.5 VAC or 195.5 - 253 VAC (Selectable)
Nominal Output Current	26A
AC INPUT	
AC Start-up Voltage / Auto Restart Voltage	120 - 140 VAC / 180 VAC
Acceptable Input Voltage Range	90 - 280 VAC or 170 - 280 VAC
Maximum AC Input Current	40A
BATTERY MODE OUTPUT (AC)	
Nominal Output Voltage	220/230/240 VAC
Efficiency (DC to AC)	93%
BATTERY & CHARGER	
Nominal DC Voltage	48 VDC
Maximum Solar Charging Current	120A
Maximum AC Charging Current	120A
Maximum Charging Current	120A
GENERAL	
PHYSICAL	
Dimension, D x W x H (mm)	140 x 295 x 468
Net Weight (kgs)	12
INTERFACE	
Parallel Function	Yes, 9 units
Communication Port	USB/RS232/RS485/Wifi/Dry-contact
ENVIRONMENT	
Humidity	0 ~ 90% RH (Non-condensing)
Operating Temperature	-10 to 50°C

Product specifications are subject to change without further notice

